



MINIATURE LEADLESS PRESSURE TRANSDUCER

XCL-072 SERIES


- Designed For Harsh Environments
- Ideal For Turbine Engine Probes and Wind Tunnel Applications
- Patented Leadless Technology **VIS®**
- Designed For Both Static and Dynamic Response
- Suitable For Use in Most Conductive Liquids and Gases

The XCL-072 design features Kulite's patented leadless technology. This allows for a very rugged package suited for probes, pressure rakes and other similar test set ups. This transducer is well suited for both dynamic and static pressure measurements in benign or harsh environments.

Part performance not guaranteed if used in water.



Kulite recommends the [KSC Series](#) of signal conditioners to maximize the measurement capability of the XCL-072 transducer.

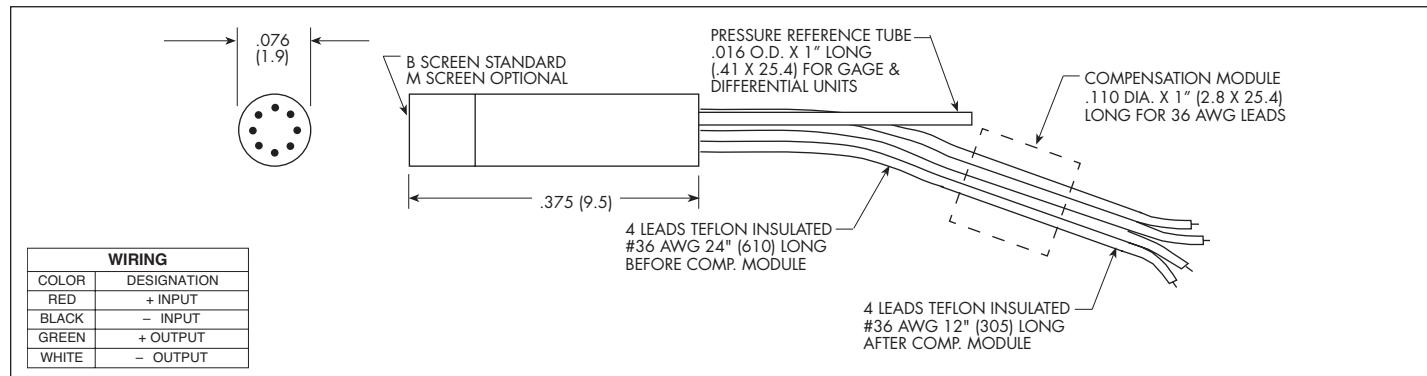

	Pressure Range	1.0 15	1.7 25	3.5 50	7 100	14 200	21 300	35 500	70 BAR 1000 PSI														
INPUT	Operational Mode	Absolute, Gage, Differential	Absolute, Gage, Sealed Gage, Differential	Absolute, Sealed Gage																			
Over Pressure																							
2 Times Rated Pressure to 500 PSI (35 BAR), 1.5 Times Rated Pressure Above 500 PSI (35 BAR)																							
Burst Pressure																							
3 Times Rated Pressure																							
Pressure Media																							
All Nonconductive, Noncorrosive Liquids or Gases (Most Conductive Liquids and Gases - Please Consult Factory)																							
Rated Electrical Excitation																							
10 VDC/AC																							
Maximum Electrical Excitation																							
12 VDC/AC																							
Input Impedance																							
1000 Ohms (Min.)																							
OUTPUT	Output Impedance	1000 Ohms (Nom.)																					
Full Scale Output (FSO)																							
100 mV (Nom.)																							
Residual Unbalance																							
± 5 mV (Typ.)																							
Combined Non-Linearity, Hysteresis and Repeatability																							
± 0.1% FSO BFSL (Typ.), ± 0.5% FSO (Max.)																							
Resolution																							
Infinitesimal																							
Natural Frequency of Sensor Without Screen (KHz) (Typ.)																							
175 200 240 300 380 550 575 700 1000																							
Acceleration Sensitivity % FS/g Perpendicular																							
1.0x10 ⁻³ 6.5x10 ⁻⁴ 5.0x10 ⁻⁴ 3.0x10 ⁻⁴ 1.5x10 ⁻⁴ 1.1x10 ⁻⁴ 9.0x10 ⁻⁵ 6.0x10 ⁻⁵ 4.0x10 ⁻⁵																							
Insulation Resistance																							
100 Megohm Min. @ 50 VDC																							
ENVIRONMENTAL	Operating Temperature Range	-65°F to +250°F (-55°C to +120°C)																					
Compensated Temperature Range																							
+80°F to +180°F (+25°C to +80°C) Any 100°F Range Within The Operating Range on Request																							
Thermal Zero Shift																							
± 2% FS/100°F (Typ.) (± 3% FS/100°F Max.)																							
Thermal Sensitivity Shift																							
± 2% /100°F (Typ.) (± 3% /100°F Max.)																							
PHYSICAL	Mechanical Shock	20g Half Sine Wave 11 msec. Duration																					
Linear Vibration																							
20g Peak, Sine 10 to 2000 Hz																							
Electrical Connection																							
4 Leads 36 AWG 36" (914) Long (36 AWG Shielded Teflon Cable Optional)																							
Weight																							
.2 Gram (Nom.) Excluding Module and Leads																							
Pressure Sensing Principle																							
Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon Patented Leadless Technology																							

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (U)

Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2014 Kulite Semiconductor Products, Inc. All Rights Reserved.

Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.