



kulite® **ULTRAMINIATURE** **PRESSURE TRANSDUCER WITH INTERNAL COMPENSATION**

XCQ-IC-062 SERIES

- Ideal For Turbine Engine Probes and Wind Tunnel Applications
- 50 Year History Of Successful Applications In Wind Tunnel And Flight Test Programs
- Patented Silicon on Silicon Integrated Sensor **VIS®**
- Size And Shape Ideal For Incorporation In User Designed Probes
- Excellent Static And Dynamic Performance

The XCQ-062 Series allows for a very rugged package suited for probes, pressure rakes and other similar test set ups. This transducer is well suited for both dynamic and static pressure measurements in benign or harsh environments. Internal compensation allows for ease of installation by eliminating the external compensation module.

Kulite recommends the [KSC Series](#) of signal conditioners to maximize the measurement capability of the XCQ-IC-062 transducer.

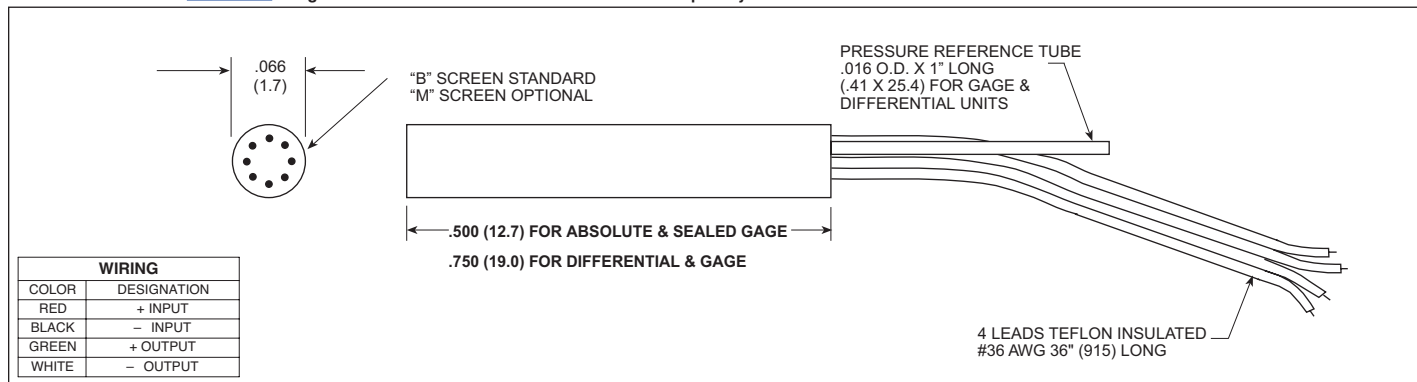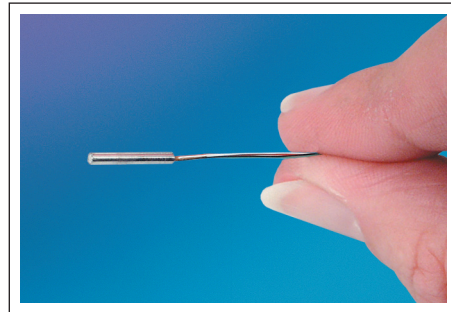

INPUT	Pressure Range	0.35 5	0.7 10	1 15	1.7 25	3.5 50	7 100	17 250	35 500	70 BAR 1000 PSI
	Operational Mode	Gage, Differential		Absolute, Gage, Differential		Absolute, Gage, Sealed Gage, Differential		Absolute, Sealed Gage		
	Over Pressure	2 Times Rated Pressure								
	Burst Pressure	3 Times Rated Pressure								
	Pressure Media	All Nonconductive, Noncorrosive Liquids or Gases								
	Rated Electrical Excitation	10 VDC/AC								
	Maximum Electrical Excitation	12 VDC/AC								
	Input Impedance	1000 Ohms (Min.)								
	OUTPUT	Output Impedance	1000 Ohms (Nom.)							
Full Scale Output (FSO)		100 mV (Nom.)								
Residual Unbalance		± 5 mV (Typ.)								
Combined Non-Linearity, Hysteresis and Repeatability		± 0.1% FSO BFSL (Typ.), ± 0.5% FSO (Max.)								
Resolution		Infinitesimal								
Natural Frequency of Sensor Without Screen (KHz) (Typ.)		150	175	200	240	300	380	550	700	1000
Acceleration Sensitivity % FS/g Perpendicular		1.5x10 ⁻³	1.0x10 ⁻³	6.5x10 ⁻⁴	5.0x10 ⁻⁴	3.0x10 ⁻⁴	1.5x10 ⁻⁴	1.0x10 ⁻⁴	6.0x10 ⁻⁵	4.5x10 ⁻⁵
Insulation Resistance		100 Megohm Min. @ 50 VDC								
ENVIRONMENTAL	Operating Temperature Range	-65°F to +250°F (-55°C to +120°C)								
	Compensated Temperature Range	80°F to +180°F (25°C to +80°C) Any 100°F Range Within The Operating Range on Request								
	Thermal Zero Shift	± 2% FS/100°F (Typ.) (± 3% FS/100°F Max.)					± 1% FS/100°F (Typ.) (± 2% FS/100°F Max.)			
	Thermal Sensitivity Shift	± 2% /100°F (Typ.) (± 3% /100°F Max.)					± 1% /100°F (Typ.) (± 2% /100°F Max.)			
	Mechanical Shock	20g Half Sine Wave 11 msec. Duration								
	Linear Vibration	20g Peak, Sine 10 to 2000 Hz								
PHYSICAL	Electrical Connection	4 Leads 36 AWG 36" (914) Long (36 AWG Shielded Teflon Cable Optional)								
	Weight	.1 grams (Nom.) for .500 Length Excluding Leads / .2 grams (Nom.) for .750 Length Excluding Leads								
	Pressure Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon								

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (E) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2020 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.